




For additional information, please visit the Bybee web site at www.BybeeLabs.com

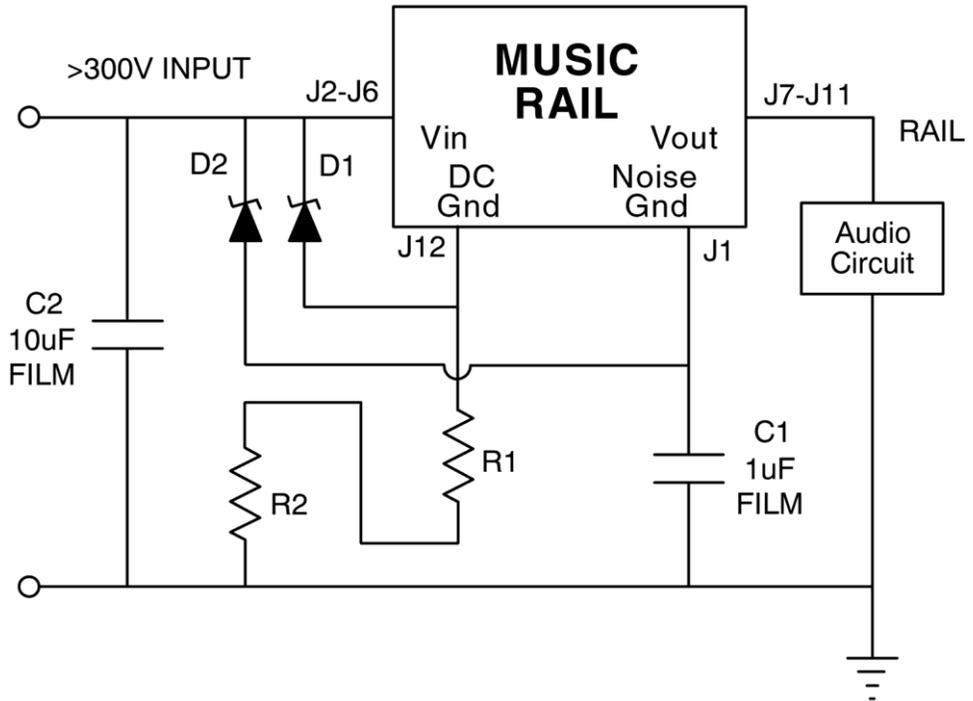

ADJUSTMENT FORMULAS

D1 current = .005 D2 current = none after C1 charges.
 Music Rail current = .0115A
 $R1 + R2 = (V_{in} - 24V) / (.005A + .0115A)$
 $R1 + R2 \text{ watts} = (V_{in} - 24V) \times (.005A + .0115A)$
 The above wattage must be derated. See app note J0413.
 C1, C2 = Voltage rating must exceed input voltage.
 D1, D2 = Reverse polarity for NEG supplies; otherwise same.

If you need additional help, please contact:
techsupport@bybeelabs.com

##

MUSIC RAILS are manufactured in the United States.

© 2011 Bybee Labs, Inc.
 8390 East Via de Ventura F-110
 Scottsdale, Arizona 85258, USA
 1-480-998-2880 / techsupport@bybeelabs.com